

Truck-mounted concrete pump M 31-5

The versatile one with the flexible 5-arm boom

Putzmeister



Robust technology: pumps, hydraulic system and hopper

- Proven reliability – the S-transfer tube
- Free flow hydraulic system in a closed circuit (almost the only manufacturer)
- Fewer switchovers thanks to large cylinder volumes
- Extremely wear-resistant

- Very smooth running
- Low-maintenance modular pump unit
- High cylinder fill level
- Longer service life thanks to internally chromed delivery cylinders, as standard
- Low hopper fill level of approx. 130 cm (unsupported)
- Operator-friendly hopper
- Powerful pumps available for any application



More reliability, greater efficiency, higher flexibility, lower costs

Supplied as standard:

- EPS (Ergonic® Pump System)
- EOC (Ergonic® Output Control)
- EGD Ergonic® Graphic Display
- EGD-RC (radio with display and enhanced setting options)
- Additional cable remote control

Optional:

- EBC (Ergonic® Boom Control)
- EBC with Follow Me

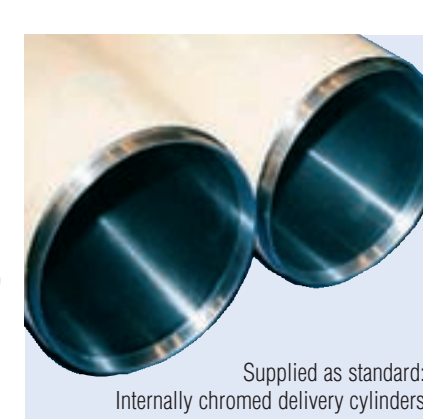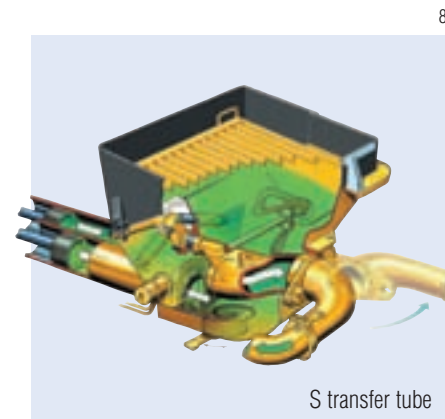

Technical data pumps

M 31-5	BSF	Output* (m³/h)	Pressure* (bar)	Stroke (mm)	Cylinder ø (mm)	Strokes/min
	...11 H	110	78	1400	230	32
	...14 H	140/88*	70/112*	2100	230	27/17*
	...16 H	160/108*	85/130*	2100	230	31/21*
	...16 H LS	160	85	2100	250	26

All data theoretical maximum values - Standard boom pipework: pressure up to max. 85 bar

* rod side/piston side - Max. delivery rates and max. delivery pressures cannot be operated at the same time.

The Putzmeister Group

Concrete Technology PCT · Mortar Technology
PMT Pipe Technology PPT · Water Technology
PWT Industrial Technology PIT · Belt Technology
PBT Underground Technology PUC

Right to make technical amendments reserved
© by Putzmeister Concrete Pumps GmbH 2010
All rights reserved · Printed in Germany
Printed in Germany (11001Sc)


Putzmeister Concrete Pumps GmbH
Max-Eyth-Str. 10 · 72631 Aichtal/Germany
P.O.Box 2152 · 72629 Aichtal/Germany
Tel. +49 (7127) 599-0 · Fax +49 (7127) 599-520
E-Mail: pmw@pmw.de · www.putzmeister.com

Putzmeister

The hall master – almost unbeatable in tight spaces

Flexible like no other: M 31-5 with 5-arm boom in Multi-Z-roll-and-fold system

- Optimally flexible 5-arm boom without dead zones and with excellent slip characteristics
- Thanks to the unique Ergonic® Boom Control (EBC), extremely easy to control boom (optional)
- Extremely low unfolding height in the 30 m class: Only 5.7 m!
- It can cope with 25-concreting areas in low buildings without changing the location, thus saving valuable time
- The high level of flexibility of the Multi-Z-folding provides real net reaches. In high-rise buildings, for example, a good few metres of net reach can be equalised, compared with other booms.
- Ready for concreting in very short time
- Standard delivery line continuously up to boom tip – simpler delivery line and lower costs compared to a telescopic solution

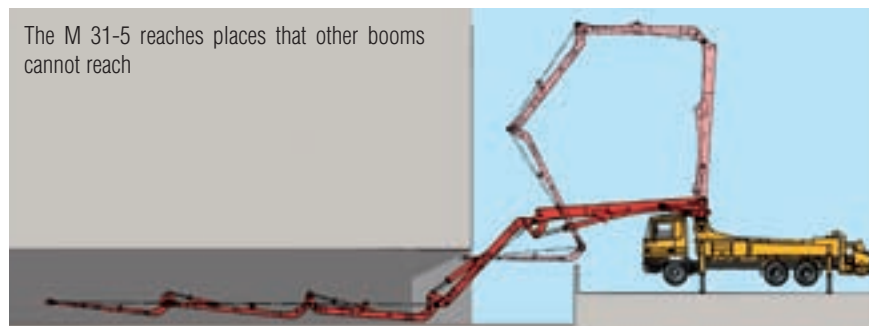

Compact, versatile and reliable – in traffic and on the construction site



- The compact design without overhang makes the M 31-5 manoeuvrable in urban areas and on the construction site
- Flexibility up to the loading areas: The modular design makes it possible to adjust the M 31-5 exactly to your requirements.



Thanks to the minimal unfolding height of only 5.7 m, the M 31-5 is unbeatable for hall concreting

Technical data Boom M 31-5

Folding type	5-section Multi-Z-roll-fold (MZR)
Vertical reach	30.5 m
Horizontal reach	26.6 m gross
Reach depth	20.4 m
Unfolding height	5.7 m
Length endhose	4 m
Delivery line	DN 125, max. 85 bar
Slewing range	365°
Support width	front / rear normal 6.3 m / 6.3 m OSS 4.6 m / 4.9 m

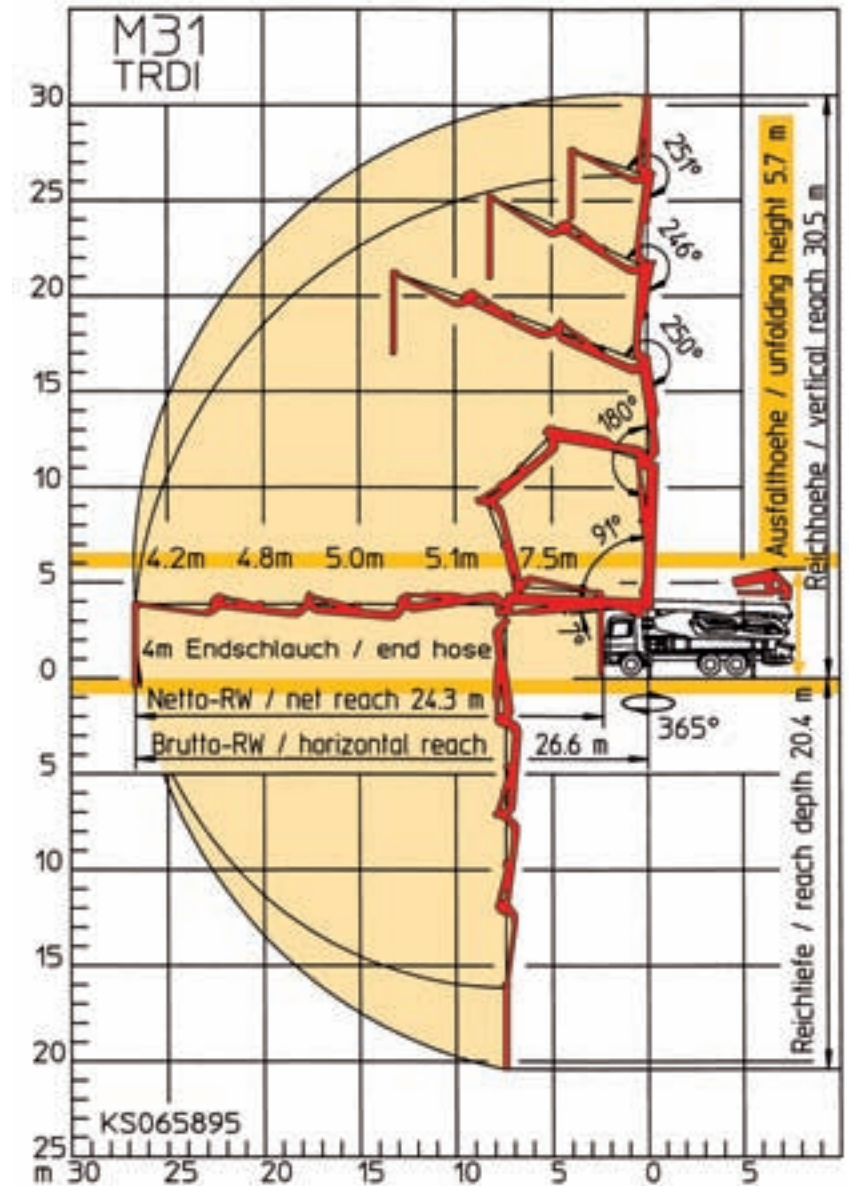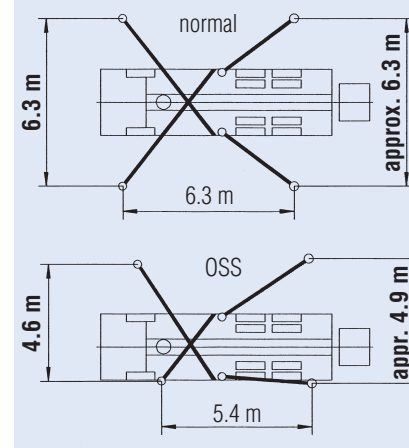

Length in total approx. 10.7 m

Height < 4.0 m