

**NEW!**

NOW ALSO AVAILABLE  
WITH RUBBER  
SEALING PLATES



# Aliva<sup>®</sup>-267 concrete spraying machine FOR POWERFUL SHOTCRETING

## ■ Large output thanks to its powerful electric motor

The required output volume can be easily reached by simply adjusting the rotor speed of the long-lasting and powerful electric motor in one or two steps. With the Aliva<sup>®</sup>-267 Top Plus machine version it is even possible to convey up to 21 m<sup>3</sup>/h, without any further adjustments on the engine.

## ■ Ideal for use with the Aliva<sup>®</sup> -302.1 spraying arm

For mechanised concrete spraying we have developed the Aliva<sup>®</sup>-267 rotary machine in combination with our spraying arm Aliva<sup>®</sup>-302.1 or mini concrete spraying system Aliva<sup>®</sup>-503.3.

## ■ Also available with synchronised liquid dosing unit


The Advanced Plus und Top Plus machine version are also equipped with a synchronised liquid dosing unit Aliva<sup>®</sup>-403.6 for accelerators.

aliva<sup>®</sup>

BUILDING TRUST



# Aliva<sup>®</sup>-267 CONCRETE SPRAYING MACHINE

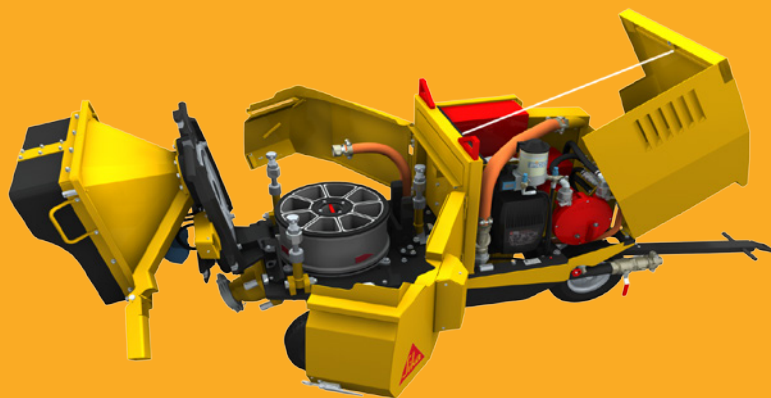

Pea gravel backfilling installation on TBM

## ADVANTAGES AND BENEFITS

- Theoretical output capacity up to 21m<sup>3</sup>/h
- Robust cover plates for optimal protection of all important parts
- Pneumatic supported clamping device
- Aluminium rotors
- Ideal for larger shotcrete applications
- Multi-functional machine for many different application fields, e.g. in tunnel constructions or in excavation pits

## STANDARD CONFIGURATION

- Rotor chamber ventilation
- Automatic lubrication system
- Frequency convertor (Top Plus version)
- Vibrating hopper

## OPTIONS

- Available with rubber sealing plates especially for dry mix spraying
- Other accessories such as Aliva<sup>®</sup> Converto spraying devices, admixture-/air hose are listed in the Aliva<sup>®</sup> Converto spare parts catalog

## Technical data

Machine type	Drive	Rotor sizes in litres	Theoretical Output* in m <sup>3</sup> /h	Max. grain sizes** in mm	Recommended hose sizes	Max. conveying distance in m horizontal/vertical***	Weight in kg	Dimensions in mm (15.5 L/on Wheels)	
								Length	Width
STANDARD	Electric (1-Speed)	15,5 26,5	9,0 16,0	20	DN 65 (DN 60)	Dry: 300/100 Wet: 40/15	1'500	Length	2'110
ADVANCED	Electric (2-Speed)	15,5 26,5	Speed 1: 6,0 Speed 2: 9,0 Speed 1: 10,0 Speed 2: 16,0						
ADVANCED PLUS	Electric (2-Speed)	15,5	Speed 1: 6,0 Speed 2: 9,0					Height	1'330
		26,5	Speed 1: 10,0 Speed 2: 16,0						
TOP PLUS	Electric (infinitely variable)	15,5	4,0-12,0					Width	935
		26,5	8,0-21,0						

\* For a theoretical filling level of 100%. \*\* Recommended grain size: Max. 8 mm. \*\*\* Depends on various factors; Longer conveying distances are possible; Aliva suggests the use of steel pipes over 80 m conveying distance. Prior to use or processing, always consult the current product data sheet of the products used. The current version of our respective General Terms and Conditions applies.



**SIKA SCHWEIZ AG**  
Aliva Equipment  
Tüffenwies 16  
CH-8048 Zürich  
Switzerland

**Contact**  
Phone +41 58 436 32 22  
Fax +41 58 436 41 40  
www.aliva-equipment.com  
aliva.equipment@ch.sika.com



**BUILDING TRUST**

