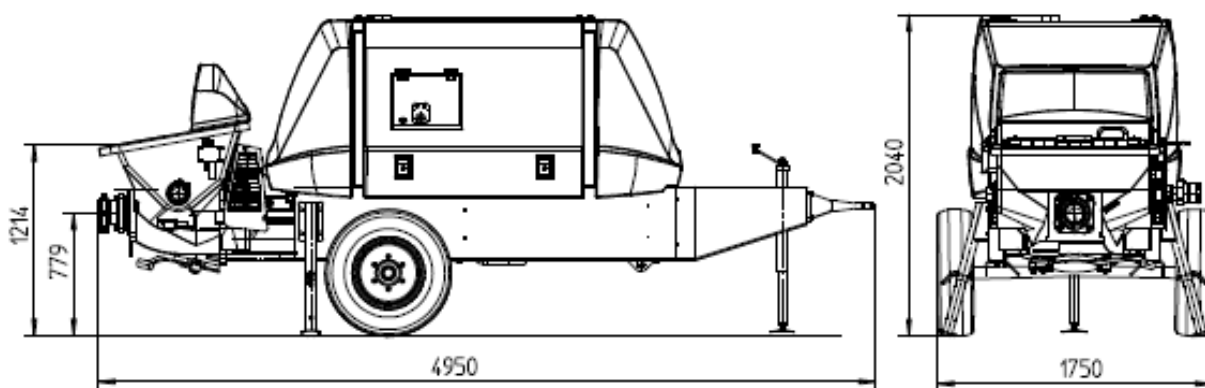



# Concrete pump

# BSA 1005 E

**Output 49 m<sup>3</sup>/h****Delivery pressure 70 bar**

Note: Standard version. Dimensions and weights depend on equipment.


## Performance diagram

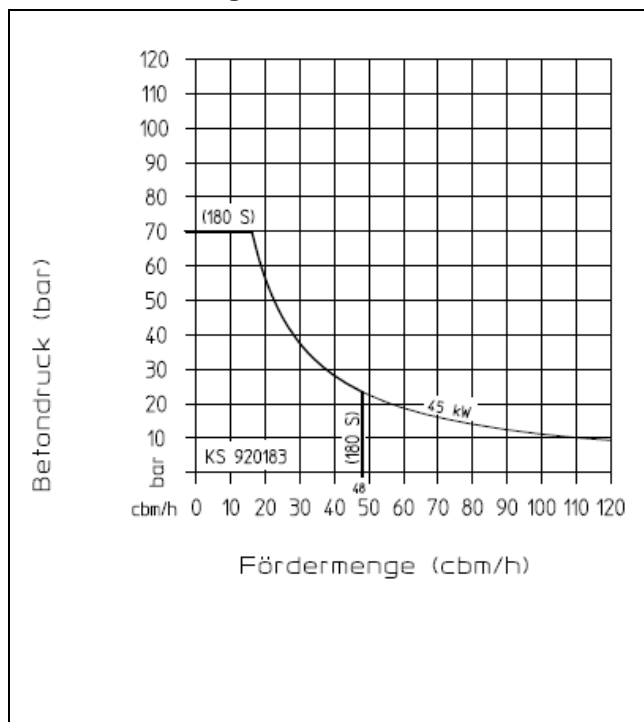


## Technical data for concrete pump

Model BSA 1005 E		102311.000
Material number		102311.000
Output	m <sup>3</sup> /h	49
Delivery pressure	bar	70
Delivery cylinder	Ø mm	180
Delivery cyl. stroke	mm	1000
Strokes / minute		32
Engine power	kW	45
Hopper		RS 487K
Capacity	l	ca. 350
Filling height	m	1,2
Transfer tube		S 1812
line connection	mm	SK 125
Pressure connection coupling	"	5,5
Control system		OPS
Weight	kg	2900

All data maximum theoretical

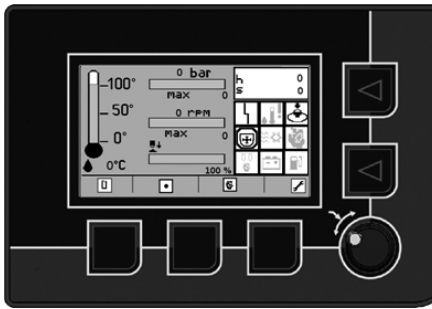

EGD - Ergonic Graphic Display

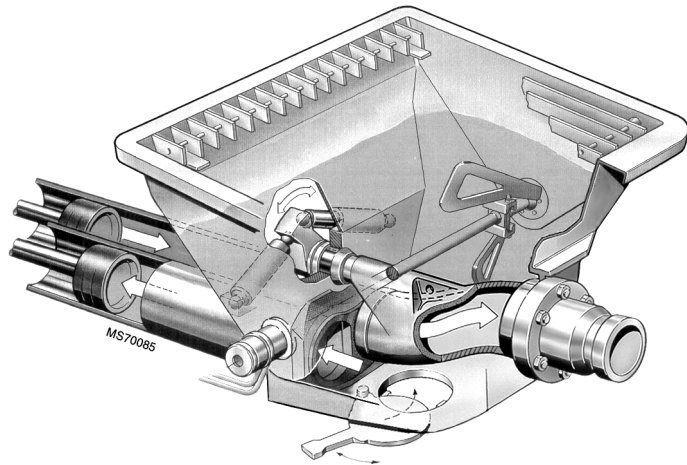

Hopper with transfer tube

### Delivery scope

- Drive electric 45kW
- Agitator safety switch off
- Cable remote control 10 m
- CE-Version:
  - Side flaps
  - Cover over switch cylinder
- Central lubrication hopper manually
- Cleaning accessories
- Concrete hopper with agitator
- Coupling ring (DIN)
- Grill 70 mm
- Operating manuals cert. and spare part lists 2x
- Splash guard
- Square outriggers 4x mech.15°-slanging
- Support leg on tow bar
- Tool set incl. standard equipment
- Trailer F8, travelling on site
- Painting:
  - Cover MB 1227 chrome yellow / black
  - Pump, frame and trailer RAL 7035 light-grey
  - Roof and splash guard RAL 7021 black-grey

### Ergonic equipment

- Concrete output adjust, electrically (EPS)
- Concrete pressure adjust (EPS)
- Electronic error management
- Operating data for pump and engine shown in Ergonic Graphic Display (EGD)
- Output delivery meter

### Optional extras

On request

**Please see quotation for detailed delivery scope.**